



Appreciating Quality Automation

We at "DOLPHIN AUTOMATION" thank you for the purchase of this product and we assure you for our best services.....always!

## Digital Humidity Controller

### H-K42/M42

#### Specifications :-

- |                   |                                  |
|-------------------|----------------------------------|
| 1. Display        | .56" 7 segment (4digit)          |
| 2. Range          | 10 to 95% RH                     |
| 3. Resolution     | 0.1 RH                           |
| 4. Accuracy       | +/- 3% (Full Scale)              |
| 5- Hysterisis     | 0 to 99 RH                       |
| 6. OFFSET         | -9.9 to 9.9 RH                   |
| 7- Relay Action   | HUMIDITY / DEHUMIDITY Selectable |
| 8. Control Action | ON / OFF or Proportional         |

<b>CYCLE TIME</b>	<b>: 1-99 Sec</b>
<b>Prop Band</b>	<b>: 0-99°C</b>


#### Terminal Connection

- 1-Connect terminals of the controller according to the terminal connections

#### Sensor Connections

- 1 Connect the sensor according to the terminal connections

## Programming the Humidity Controller

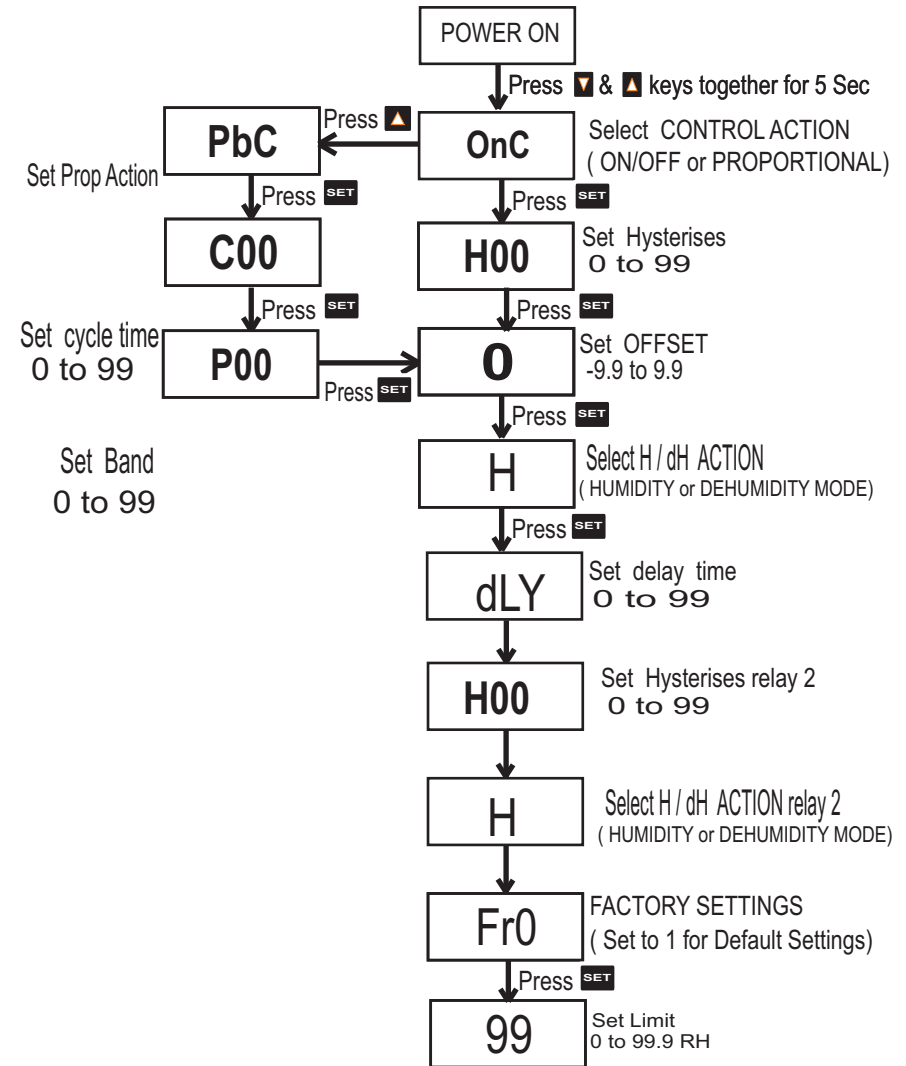

NOTE: : AT PROG MODE Process Humidity will not be displayed .

Note: To come out of Programming leave the Keys unpressed for more than 4 seconds.

# Programming the Humidity Controller

## DIGITAL HUMIDITY CONTROLLER

### Specifications :-

- |                   |                                  |
|-------------------|----------------------------------|
| 1. Display        | .56" 7 segment (4digit)          |
| 2. Range          | 10 to 95% RH                     |
| 3. Resolution     | <u>0.1 RH</u>                    |
| 4. Accuracy       | +/- 3% (Full Scale)              |
| 5- Hysterisis     | 0 to 99 RH                       |
| 6. OFFSET         | -9.9 to 9.9 RH                   |
| 7- Relay Action   | HUMIDITY / DEHUMIDITY Selectable |
| 8. Control Action | ON / OFF or Proportional         |


<b>CYCLE TIME</b>	<b>: 1-99 Sec</b>
<b>Prop Band</b>	<b>: 0-99°C</b>

### Terminal Connection

- 1-Connect terminals of the controller according to the terminal connections

### Sensor Connections

- 1 Connect the sensor according to the terminal connections

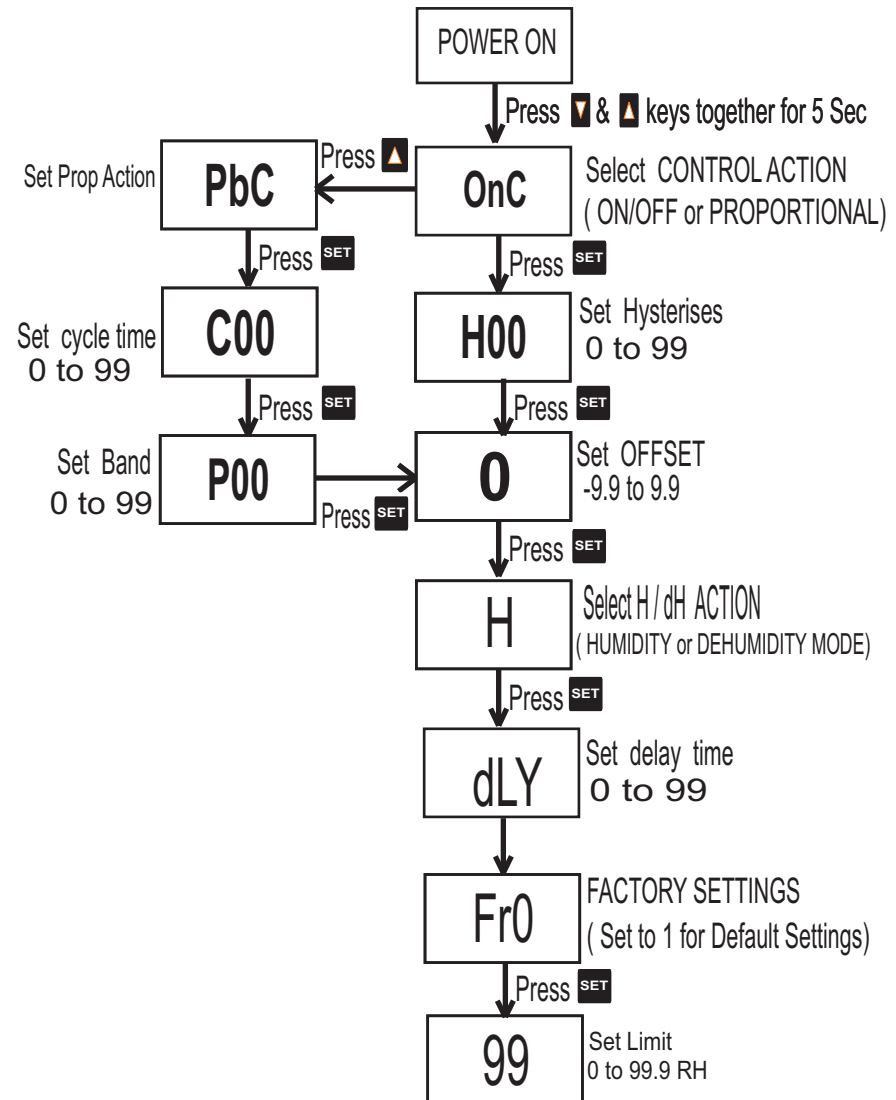

**NOTE: : AT PROG MODE Process Humidity will not be displayed .**  
**Note: To come out of Programming leave the Keys unpressed for more than 4 seconds.**